


FLANGE ADAPTER

Model: FLA02

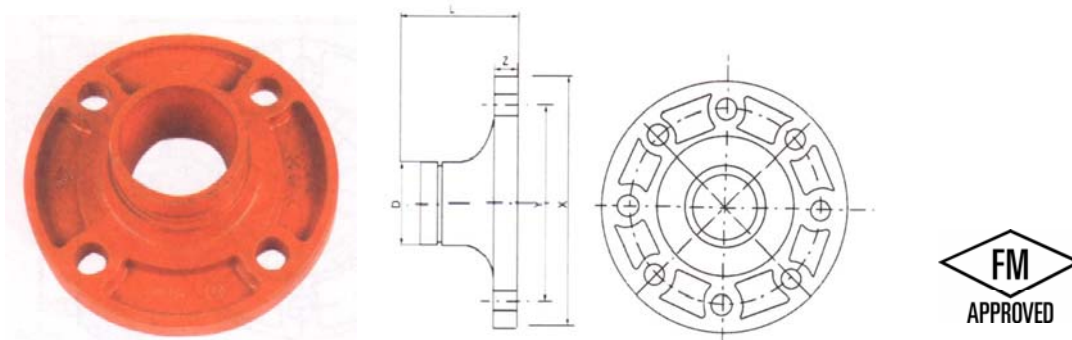

Nominal Size Inches	Pipe O.D. mm/in	Working Pressure psi/kPa	Dimensions				Bolt Size No. - Size mm	Net Weight Approx kg
			L mm/in	X mm/in	Y mm/in	Z mm/in		
2	60.3	500	60.3	152.5	125.0	18.0	4-M16	2.31
	2.375	3450	2.375	6.00	4.92	0.71		
2 ¹ / ₂	73	500	60.3	185.0	145.0	18.0	4-M16	3.42
	2.875	3450	2.375	7.28	5.70	0.71		
3 O.D.	76.1	500	60.3	185.0	145.0	18.0	4-M16	3.47
	3.000	3450	2.375	7.28	5.70	0.71		
3	88.9	500	60.3	200.0	160.0	18.0	8-M16	4.00
	3.500	3450	2.375	7.87	6.30	0.71		
4	114.3	500	60.3	229.0	180.0	18.0	8-M16	4.20
	4.500	3450	2.375	9.00	7.09	0.71		
5	141.3	500	60.3	254.0	210.0	18.0	8-M16	5.46
	5.563	3450	2.375	10.00	8.27	0.71		
6 ¹ / ₂ O.D.	165.1	500	65.1	280	240.0	20.0	8-M20	6.64
	6.500	3450	2.563	11.00	9.45	0.78		
6	168.3	500	65.1	280.0	240.0	20.0	8-M20	6.91
	6.625	3450	2.563	11.00	9.54	0.78		
8	219.1	500	76.1	340.0	295.0	23.0	12-M20	10.70
	8.625	3450	3.000	13.40	11.61	0.91		

Model	Pipe	Size (in.)
FLA02	Schedule 10 steel pipe	2, 2-1/2, 3, 4, 5, 6, 8
FLA02	BS1387 Schedule 10 steel pipe	3O.D., 6-1/2 O.D.
FLA02	Schedule 40 steel pipe	2, 2-1/2, 3, 4, 5, 6, 8
FLA02	BS1387 Schedule 40 steel pipe	3O.D., 6-1/2 O.D.

Material: Housing - Ductile iron conforming to ASTM A-536, Grade 65-45-12

Protective Coatings: ▪ Non-lead orange paint ▪ Fire brigade red (optional) non - lead paint
▪ Hot dipped galvanized conforming to ASTM A-153

Specifications, illustrated materials and descriptions are accurate as known at time of publication and are subject to change without notice.